

Series

M (60, 125, 250, 500)



CE FCC IP65  

Total Reliability - Advanced Diagnostics, Unrivaled Output Pressure, Wide Temp Capability.

# Technolube **M**

# Technolube M

Powerful & Long-Term Reliable  
Electromechanical Lubricator




## Features

<b>Cost Savings</b>	Substantial savings from the use of replaceable grease pouches and battery packs (Service Pack)
<b>Remote Installation</b>	High output pressure (30bar) enables remote installation up to 10m (33ft)
<b>Multi-Point Installation</b>	Up to 8 lube points using Ø6 tube, Max. 6m (20ft) per point
<b>Simple Operation</b>	Easy to program with built-in LCD and simple button controls
<b>Convenient Maintenance</b>	Transparent container for easy visual inspection of remaining lubricant
<b>Other Features</b>	<ul style="list-style-type: none"> <li>• Various dispensing settings &amp; grease pouch volumes to suit a wide range of industrial applications</li> <li>• Auto Lock Out mode to prevent unintentional mode changes</li> <li>• Easy to install in hazardous &amp; confined areas</li> </ul>



## Product Cross Section

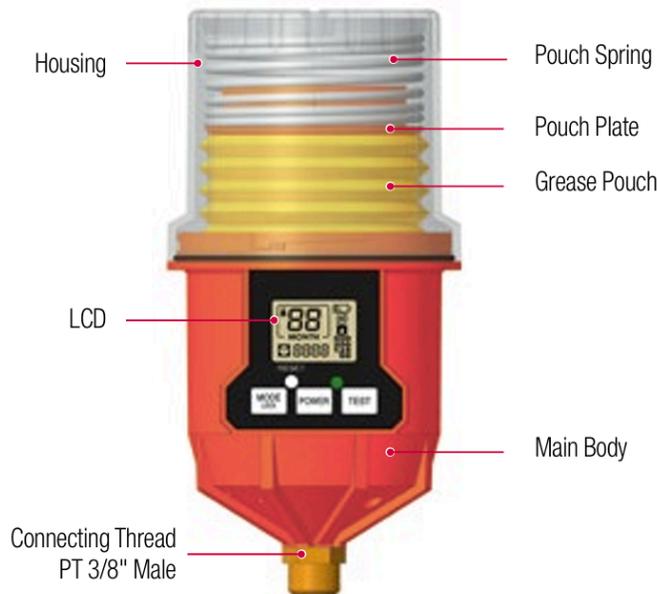

## Product Specifications

<b>Grease Pouch Capacity</b>	60ml / 125ml / 250ml / 500ml (capacity setting available)
<b>Power Supply</b>	DC 4.5V Battery Pack (replaceable) Alkaline Battery/ Lithium Battery
<b>Operating Pressure</b>	30~60bar (435~870psi)
<b>Operating Temperature</b>	Standard Alkaline Battery : -15°C~60°C Optional Lithium Battery : -40°C~60°C
<b>Dispensing Periods</b>	1 - 12 month
<b>Single Point Remote Installation</b>	Max. 10m (33ft) with Ø6 tube
<b>Multi-Point Installation</b>	Max. 6m Ø6 tube (Up to 8 points)